

Multimedia Projector

LV-S300

you can



The bright, compact SVGA portable projector that offers outstanding value for money.

Introducing Canon image quality at an all-new price point, the affordable LV-S300 portable projector delivers bright, clear SVGA images. The long lamp life and easy maintenance keep your running costs down.

Key features

- Project clearly in SVGA resolution (800 x 600 pixels)
- 3000 lumens brightness and 2300:1 contrast ratio delivers clear, vibrant images
- 1.1x zoom lens allows flexible projector placement
- Direct Power Off eliminates waiting for shut-down
- Compact and lightweight: just 2.5 kg
- Vertical keystone correction
- 5000h lamp life (6000h in Eco Mode)
- 2 x VGA ports
- Built-in 2W speaker

What's in the box

Multimedia Projector LV-S300, Remote Controller, Battery, AC Mains Power Cable, Computer Connection Cable, Instruction Manual on CD-ROM, Important Information and Quick Start Document, European Warranty Document

Dimensions (W x H x D)

282 mm x 115 mm x 232 mm

Weight

2.5 kg



PROJECTOR

Canon

LV-S300

Specifications



MULTIMEDIA PROJECTOR		
Product Class	Ultra-Portable	
LCD PANEL		
Type	Reflective DLP™ chip	
Size and Number	0.55" diagonal, Single chip	
Aspect Ratio	4:3	
Native Resolution	800 x 600 (SVGA), 480000 pixels	
OPTICS		
Lamp Type	190W P-VIP	
Lens F Number and Focal Length	F2.56 - F2.8; f = 21.0 - 23.1mm	
Zoom Magnification and Control	1.1x Manual	
Focus Control	Manual	
Lens Shift	60% (fixed)	
IMAGE AND AUDIO		
Brightness	3000 lumens (2100 Lumens Eco mode)	
Brightness Uniformity	80%	
Contrast Ratio	2300:1 (with lamp control)	
Projection Distance Coverage	2.27m - 5.67m (3.78m to 4.15m for 100" image)	
Screen Size	60" - 150" (122 x 91cm - 305 x 229cm)	
Projection Ratio	1.86:1 - 2.04:1	
Digital Zoom Magnification	2x maximum	
Keystone Correction Range	Vertical: Manual +/-30°	
Analogue RGB Compatibility	(UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA / MAC	
Component Video Scan Systems	1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
Video / S-Video Colour Systems	PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM	
Display Modes	Presentation, Standard, sRGB, Movie, User 1 & 2	
Built-in Speaker	2W RMS, Monaural	
PORT AND CONNECTORS		
Analogue RGB Input 1	Mini D-Sub 15-pin (Component Video via optional cable)	
Analogue RGB Input 2	Mini D-Sub 15-pin (Component Video via optional cable)	
S-Video Input	Mini DIN 4-pin	
Composite Video Input	RCA x1	
Audio Input	3.5mm stereo mini-jack	
Audio Output	3.5mm stereo mini-jack (variable level)	
Projector Control	Mini D-Sub 9-pin (RS-232C)	
Service Port	USB Type B	
MECHANISMS		
Front Elevation Mechanism	1x Mechanical foot, 6° maximum image elevation	
Rear Adjustment Mechanism	1x Mechanical foot	
RATINGS		
Dimensions (W x H x D)	282 mm x 115 mm x 232 mm (including protrusions)	
Weight	2.5 kg	
Power Source	100V - 240V AC, 50/60Hz	
Power Consumption	Normal Mode: 330W / Eco Mode: 275W / Standby: 0.5W	
Noise Level	Normal Mode: 35dBA / Eco Mode: 29dBA	
Operating Environment	0°C to +40°C	
Warranty	3 years	

All data is based on Canon standard testing methods except where indicated.
Subject to change without notice.

™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.

Connectivity



- 1 USB type B: Service port
- 2 Mini Dsub 15 x 2: Analog PC input / Component video input
- 3 Dsub9: RS232C connection
- 4 RCA: Video input
- 5 Mini jack x 2: Audio input x 1, Audio output x 1



Canon Inc
canon.com

Canon Europe
canon-europe.com

Canon Europe Ltd
3 The Square, Stockley Park
Uxbridge, Middlesex
UB11 1ET UK

English Edition
© Canon Europa N.V., 2014

Multimedia Projector

LV-S300
you can



The bright, compact SVGA portable projector that offers outstanding value for money.

The whole range consists of:

XEED: WUX5000, WUX5000 Medical, WUX4000, WUX4000 Medical, WX6000, WX6000 Medical, SX6000, SX6000 Medical, WUX450, WUX450 Medical, WUX400ST, WUX400ST Medical, WX520, WX520 Medical, WX450ST, WX450ST Medical.

LV: LV-S300, LV-WX300, LV-WX300ST, LV-X300, LV-X300ST, LV-8235UST, LV-7490.

Box Dimensions (W x H x D)
185 mm x 345 mm x 377 mm

Box Weight (Gross / Net)
Approx. 3.6 kg

Packet style	Quantity of item
Pallet	Logistical = 1
	Financial = 1


MERCURY CODES

PRODUCT

Name	Mercury Code	EAN Code
Multimedia Projector LV-S300 (E)	9964B003AA	4549292021561
Multimedia Projector LV-S300 (GB)	9964B005AA	8714574624945

OPTIONS

Remote Controller LV-RC08	0029C001AA	4549292024203
Soft Carrying Case LV-SC01	5331B001AA	4960999787930
Projector Lamp LV-LP37	0030C001AA	4549292024210

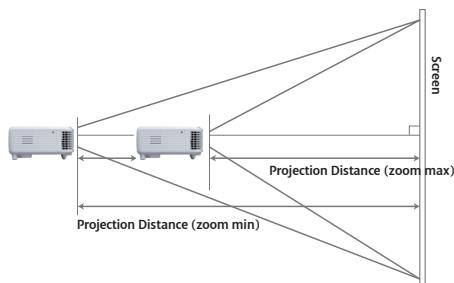

THROW DISTANCES (4:3 aspect ratio)

Image size (4:3)	Diagonal [type]	60	70	80	90	100	110	120	130	140	150
	Width [m]	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
	Height [m]	0.9	1.1	1.2	1.4	1.5	1.7	1.8	2.0	2.1	2.3
Projection distance	L (W) [m]	2.3	2.6	3.0	3.4	3.8	4.2	4.5	4.9	5.3	5.7
	L (T) [m]	2.5	2.9	3.3	3.7	4.2	4.6	5.0	—	—	—

www.canon.com/lcd-sim



Canon